


ASTM F436 HARDENED WASHER 高强度美制垫圈F436

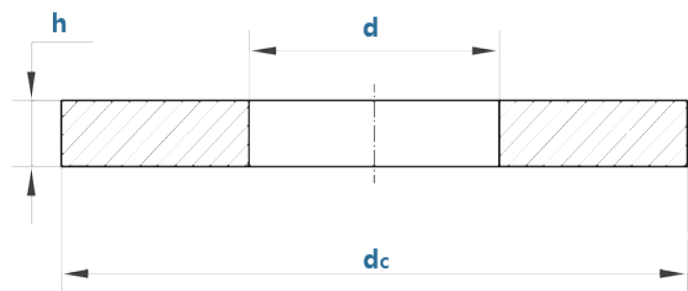

Size	d		dc		h			per 1000 units
	Min	Max	min	max	pitch	min	max	kg
1/4	7.52	7.92	15.1	15.5	1.7	1.3	2.02	2.06
5/16	9.12	9.52	16.7	17.1	1.7	1.3	2.02	2.36
3/8	10.69	11.09	19.87	20.27	1.7	1.3	2.02	3.26
7/16	12.29	12.69	23.42	23.82	1.7	1.3	2.02	4.13
1/2	13.87	14.27	27	27.4	3.5	2.47	4.48	11.7
5/8	17.86	18.26	32.57	32.97	3.8	3.1	4.48	18.86
3/4	21.03	21.43	37.31	37.71	3.8	3.1	4.48	22.56
7/8	24.21	24.61	44.45	44.85	4	3.46	4.48	34.5
1	28.96	29.36	50.02	50.42	4	3.46	4.48	45.32
1-1/8	32.13	32.53	57.15	57.55	4	3.46	4.48	57.25
1-1/4	35.31	35.71	63.5	63.9	4	3.46	4.48	68.88
1-3/8	38.48	38.88	69.07	69.47	4	3.46	4.48	84.53
1-1/2	41.66	42.06	76.2	76.6	4	3.46	4.48	100.43
1-3/4	48.01	48.41	85.73	86.13	5.8	4.53	7.1	181.61
2	55.14	55.54	93.69	94.09	5.8	4.53	7.1	219.93
2-1/4	61.49	61.89	100.04	100.44	7.4	6.1	8.52	305.06
2-1/2	67.84	68.24	112.74	113.14	7.4	6.1	8.52	393.2
2-3/4	74.19	74.59	125.44	125.84	7.4	6.1	8.52	492.7
3	80.54	80.94	138.14	138.54	7.4	6.1	8.52	602.92
3-1/4	86.89	87.29	150.84	151.24	7.4	6.1	8.52	724.33
3-1/2	94.8	95.2	161.98	162.38	7.4	6.1	8.52	857.46
3-3/4	101.15	101.55	174.68	175.08	7.4	6.1	8.52	1000.28
4	107.5	107.9	187.38	187.78	7.4	6.1	8.52	1154.8