


Flat Plain Washers DIN433

平垫圈DIN433

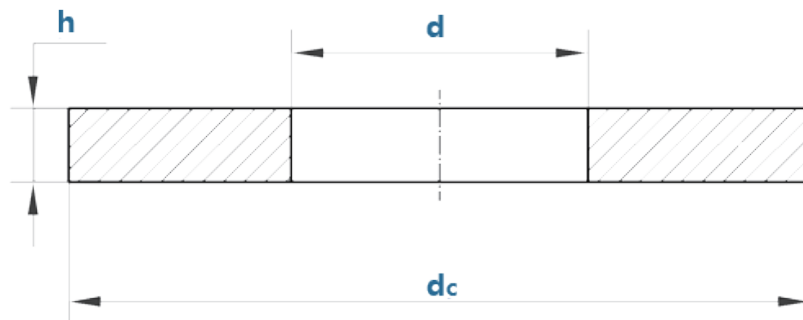

Size	d		dc		h			per 1000 units
	Min	Max	max	min	pitch	max	min	kg
M1	1.1	1.24	2.5	2.25	0.3	0.35	0.25	0.01
M1.2	1.3	1.44	3	2.75	0.3	0.35	0.25	0.014
M1.4	1.5	1.64	3	2.75	0.3	0.35	0.25	0.012
M1.6	1.7	1.84	3.5	3.2	0.3	0.35	0.25	0.017
M1.8	2	2.14	4	3.7	0.3	0.35	0.25	0.022
M2	2.2	2.34	4.5	4.2	0.3	0.35	0.25	0.029
M2.5	2.7	2.84	5	4.7	0.5	0.55	0.45	0.055
M3	3.2	3.38	6	5.7	0.5	0.55	0.45	0.079
M3.5	3.7	3.88	7	6.64	0.5	0.55	0.45	0.109
M4	4.3	4.48	8	7.64	0.5	0.55	0.45	0.14
M5	5.3	5.48	9	8.64	1	1.1	0.9	0.326
M6	6.4	6.62	11	10.57	1.6	1.8	1.4	0.79
M8	8.4	8.62	15	14.57	1.6	1.8	1.4	1.52
M10	10.5	10.77	18	17.57	1.6	1.8	1.4	2.11
M12	13	13.27	20	19.48	2	2.2	1.8	2.85
M14	15	15.27	24	23.48	2.5	2.7	2.3	5.41
M16	17	17.27	28	27.48	2.5	2.7	2.3	7.63
M18	19	19.33	30	29.48	2.5	2.7	2.3	8.31
M20	21	21.33	34	33.38	3	3.3	2.7	13.2
M24	25	25.33	39	38.38	4	4.3	3.7	22.1
M30	31	31.39	50	49.38	4	4.3	3.7	38
M36	37	37.62	58	56.8	5	5.6	4.4	61.5