


## Flat Plain Washers DIN9021 平垫圈DIN9021

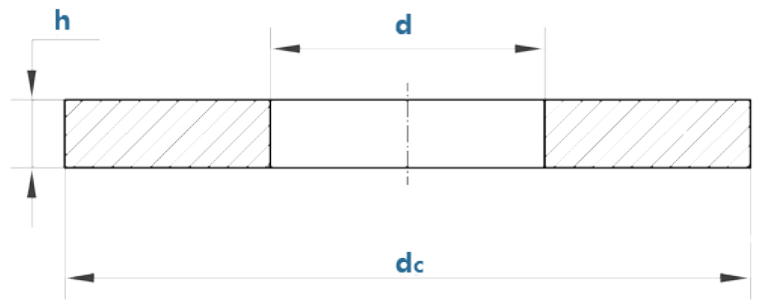

Size	thread diameter	d1		dc		h			per 1000 units kg
		Min	Max	max	min	pitch	max	min	
2.7	2.5	2.7	2.84	8	7.64	0.8	0.9	0.7	0.28
3.2	3	3.2	3.38	9	8.64	0.8	0.9	0.7	0.349
3.7	3.5	3.7	3.88	11	10.57	0.8	0.9	0.7	0.529
4.3	4	4.3	4.48	12	11.57	1	1.1	0.9	0.774
5.3	5	5.3	5.48	15	14.57	1.2	1.4	1	1.46
6.4	6	6.4	6.62	18	17.57	1.6	1.8	1.4	2.79
7.4	7	7.4	7.62	22	21.48	2	2.2	1.8	5.29
8.4	8	8.4	8.62	24	23.48	2	2.2	1.8	6.23
10.5	10	10.5	10.77	30	29.48	2.5	2.7	2.3	12.2
13	12	13	13.27	37	36.38	3	3.3	2.7	22.2
15	14	15	15.27	44	43.38	3	3.3	2.7	31.6
17	16	17	17.27	50	49.38	3	3.3	2.7	40.9
20	18	20	20.52	56	54.1	4	4.6	3.4	67.4
22	20	22	22.52	60	58.1	4	4.6	3.4	76.8
26	24	26	26.84	72	70.1	5	6	4	139
33	30	33	34	92	89.8	6	7	5	273
39	36	39	40	110	107.8	8	9.2	6.8	522