


Metric Plain Washers BS4320A
公制平垫圈 BS4320A

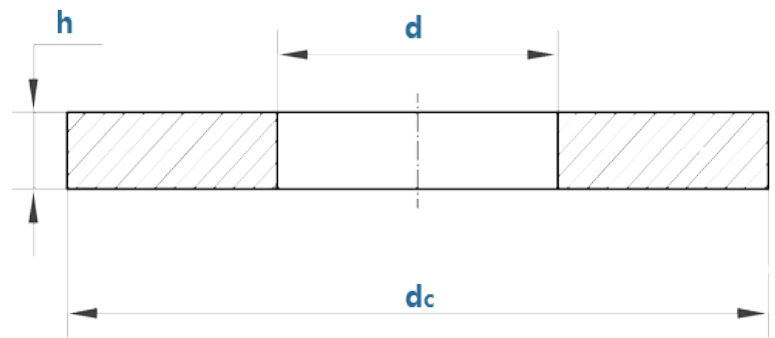

Size	d			dc			h		
	pitch	Max	Min	pitch	max	min	pitch	max	min
M1	1.1	1.25	1.1	2.5	2.5	2.3	0.3	0.4	0.2
M1.2	1.3	1.45	1.3	3	3	2.8	0.3	0.4	0.2
(M1.4)	1.5	1.65	1.5	3	3	2.8	0.3	0.4	0.2
M1.6	1.7	1.85	1.7	4	4	3.7	0.3	0.4	0.2
M2	2.2	2.35	2.2	5	5	4.7	0.3	0.4	0.2
(M2.2)	2.4	2.55	2.4	5	5	4.7	0.5	0.6	0.4
M2.5	2.7	2.85	2.7	6.5	6.5	6.2	0.5	0.6	0.4
M3	>3.2	3.4	3.2	7	7	6.7	0.5	0.6	0.4
(M3.5)	3.7	3.9	3.7	7	7	6.7	0.5	0.6	0.4
M4	4.3	4.5	4.3	9	9	8.7	0.8	0.9	0.7
(M4.5)	4.8	5	4.8	9	9	8.7	0.8	0.9	0.7
M5	5.3	5.5	5.3	10	10	9.7	1	1.1	0.9
M6	6.4	6.7	6.4	12.5	12.5	12.1	1.6	1.8	1.4
(M7)	7.4	7.7	7.4	14	14	13.6	1.6	1.8	1.4
M8	8.4	8.7	8.4	17	17	16.6	1.6	1.8	1.4
M10	10.5	10.9	10.5	21	21	20.5	2	2.2	1.8
M12	13	13.4	13	24	24	23.5	2.5	2.7	2.3
(M14)	15	15.4	15	28	28	27.5	2.5	2.7	2.3
M16	17	17.4	17	30	30	29.5	3	3.3	2.7
(M18)	19	19.5	19	34	34	33.2	3	3.3	2.7
M20	21	21.5	21	37	37	36.2	3	3.3	2.7
(M22)	23	23.5	23	39	39	38.2	3	3.3	2.7
M24	25	25.5	25	44	44	43.2	4	4.3	3.7
(M27)	28	28.5	28	50	50	49.2	4	4.3	3.7
M30	31	31.6	31	56	56	55	4	4.3	3.7
(M33)	34	34.6	34	60	60	59	5	5.6	4.4
M36	37	37.6	37	66	66	65	5	5.6	4.4
(M39)	40	40.6	40	72	72	71	6	6.6	5.4